

## **A NEW DUAL-POLARIZED GAP-FED PATCH ANTENNA**

**S. Ononchimeg, J.-H. Bang, and B.-C. Ahn**

Department of Radio and Communication Engineering  
Chungbuk University  
Cheongju City, 361-763, Republic of Korea

**E.-J. Cha**

Department of Medicine  
Chungbuk University  
Cheongju City, 361-763, Republic of Korea

**Abstract**—In this paper, a new compact dual-polarized microstrip patch antenna is proposed. The patch is of rectangular shape and fed by a gap between the patch edge and a microstrip open end. Gap feeding at the edge of a rectangular patch antenna is proposed for the first time in this paper. This method of feeding occupies a negligible space compared to other feeding methods such as a quarter-wave transformer feeder, an inset feeder, a proximity coupler, and an aperture-coupled feeder. Dual-polarized radiation is realized by feeding a rectangular patch with two orthogonal gaps. First, a single-polarized patch is designed. The impedance matching property of the gap is analyzed using an equivalent circuit. Next, starting from dimensions of the single-polarized patch, a dual-polarized patch antenna is designed by optimizing the patch length and gap width. The designed antenna is fabricated and tested. The fabricated antenna has reflection coefficient less than  $-10$  dB, port isolation greater than  $30$  dB, over  $14.5$ – $15.2$  GHz, and a gain of  $6.2$  dBi at  $14.9$  GHz.

### **1. INTRODUCTION**

Microstrip antennas find diverse applications due to compactness, light weight and ease of fabrication [1–3]. Recently, dual-polarized microstrip patch antennas (DPMPA) are getting more attention for

---

Corresponding author: S. Ononchimeg (ononchimegs@yahoo.com).

various applications. DPMPA's are usually realized by exciting a microstrip patch with two orthogonally-placed feed lines [4–9]. Among methods of feeding a microstrip patch antenna (MPA) are direct feeding with a quarter-wave transformer, direct proximity coupling, proximity coupling via an aperture in the ground plane, and feeding by a coaxial probe.

Feeding patch antennas may also be achieved by a narrow gap between a microstrip open end and the patch edge. This gap feeding method enables one to realize a dual-polarized patch antenna in a minimum space. There have been a few studies in the gap feeding method. In Yu's work [10], a ring resonator is coupled to a microstrip line via a gap. In Jung's work [11], the coupling gap is used in the inset-fed patch antenna. The method of feeding a rectangular patch and a DPMPA by a gap between a microstrip open end and the patch edge, however, has not been published to the best of authors' knowledge.

In this paper, we propose a new compact dual-polarized microstrip patch antenna fed by gap. First, we present a single rectangular patch antenna fed by a gap. Next, based on the single patch design, we describe the structure and design of a dual-polarized patch antenna fed by gap. The idea of a dual-polarized gap-fed patch antenna presented in this paper is new and authors' own contribution. The proposed antenna is analyzed and optimized using the widely-used electromagnetic simulation software Microwave Studio<sup>TM</sup> (MWS) by CST. The designed antenna is fabricated and its performance is measured and compared with the simulation.


## 2. ANTENNA DESIGN

### 2.1. Gap-fed Rectangular Patch Antenna


A rectangular patch of width  $w_p$  and length  $l_p$  shown in Fig. 1 is printed on a substrate and fed by the gap between the open end of a microstrip line and the patch edge. The impedance matching is achieved by a gap which transforms the impedance seen at one of two radiating edges of the patch into the characteristic impedance of the feed line, usually  $50\ \Omega$ .

The structure in Fig. 1 can be represented by an equivalent circuit shown in Fig. 2 [12]. The patch impedance  $Z_p$  is transformed into the input impedance  $Z_{in}$  by equivalent capacitances of the gap  $C_g$ ,  $C_{pm}$  and  $C_{pp}$ . Equivalent capacitances of an asymmetric microstrip gap can be evaluated using closed-form formulas by Kirschning and co-workers [13].

The design of the antenna shown in Fig. 1 starts with the initial value of the patch size. The patch width determines the level of the

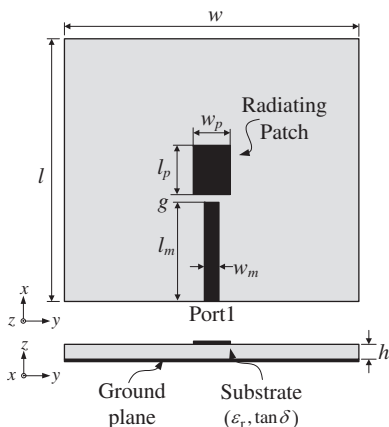

**Figure 1.** Structure of a rectangular patch fed by a single gap.

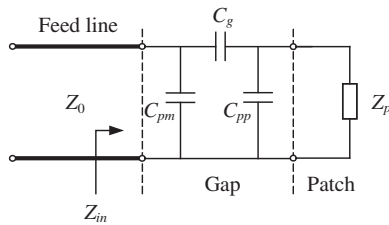


**Figure 2.** Equivalent circuit of a rectangular patch fed by a single gap.

radiation resistance of the patch. The patch length determines the resonant frequency. For this work, we designed the antenna for use at 14.9 GHz with a bandwidth of 400 MHz for terrestrial microwave communication applications. The proposed antenna, however, can be realized at any frequency as far as it can be fabricated within a specified tolerance. With patch initial dimensions  $w_p$  and  $l_p$  calculated using design equations in [14] for  $f_r = 14.9$  GHz,  $\epsilon_r = 2.5$  and  $h = 0.787$  mm, we adjust patch width  $w_p$ , patch length  $l_p$  and gap width  $g$  for good impedance matching. The final dimensions of the patch antenna are  $w_p = 4$  mm,  $l_p = 5.24$  mm,  $g = 0.40$  mm,  $w_m = 2.26$  mm, and  $l_m = 16.95$  mm. The impedance seen at one edge of the patch  $Z_p$  is found to be  $320 - j55 \Omega$  from the simulation by Microwave Studio<sup>TM</sup>, which is then transformed into the input impedance  $Z_{in} = 50 - j0.02 \Omega$  by capacitances  $C_{pm} = 0.051$  pF,  $C_{pp} = 0.162$  pF, and  $C_g = 0.035$  pF. Values of capacitances  $C_{pm}$ ,  $C_{pp}$ , and  $C_g$  are calculated using formulas in [13].


The width 2.26 mm of a 50-ohm microstrip line on a 0.787-mm thick substrate is not small compared with the width of the patch. To verify that the line operates in its fundamental quasi-TEM mode, we have calculated the frequency  $f_{HE,1}$  for the onset of the  $HE_1$  mode [15] and the frequency  $f_{CT}$  for the lowest-order transverse microstrip resonance using formulas in [16] and obtained  $f_{HE,1} = 25.4$  GHz and  $f_{CT} = 36.8$  GHz, which are much larger than the operating frequency 14.9 GHz of the antenna. Therefore the 50-

ohm microstrip should perform satisfactorily in its quasi-TEM mode. It is well known that the radiation from a uniform microstrip line operating in its fundamental quasi-TEM mode is very small. Some radiation may occur at discontinuities in the microstrip line. In the case of the proposed antenna, the only discontinuity is the microstrip open end, which in our case is part of the radiating aperture.

Figures 3 and 4 show the simulated reflection coefficient and the gain pattern, respectively, of the patch antenna of Fig. 1. The antenna has a very low reflection coefficient of  $-45$  dB at the resonant frequency  $14.9$  GHz. The impedance bandwidth ( $-10$  dB reflection) is  $4.15\%$  ( $620$  MHz), the antenna gain is  $6.8$  dBi, and  $3$ -dB beamwidths are  $89^\circ$  and  $77^\circ$  in vertical and horizontal planes, respectively.

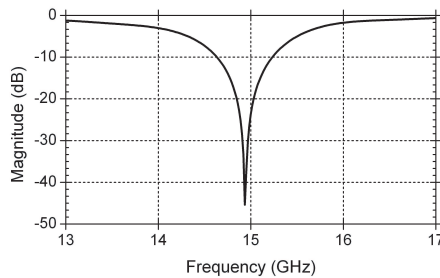


**Figure 3.** Reflection coefficient of a rectangular patch fed by a single gap.

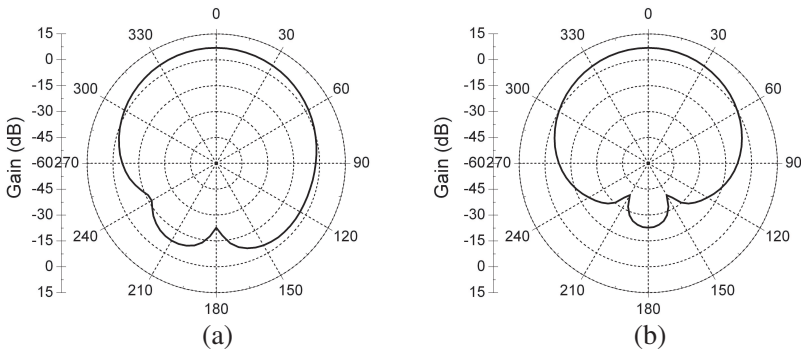


**Figure 4.** Gain patterns of a rectangular patch fed by a single gap. (a) Vertical and (b) horizontal planes.

### 2.2. Dual Polarized Gap-fed Patch Antenna


The proposed antenna shown in Fig. 5 is fed by two orthogonal gaps. First, dimensions of a rectangular patch fed by a single gap are used as the initial dimensions of the dual-polarized patch. With initial dimensions un-modified, the dual-polarized antenna has poor performance as can be seen in Fig. 6, where the reflection and isolation performances of the un-optimized patch are shown. The patch impedance  $Z_p$  is not well matched to the characteristic impedance  $Z_0$  of the feed line.

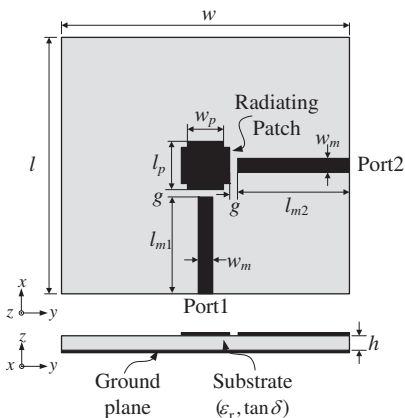


**Figure 5.** Structure of the proposed antenna.

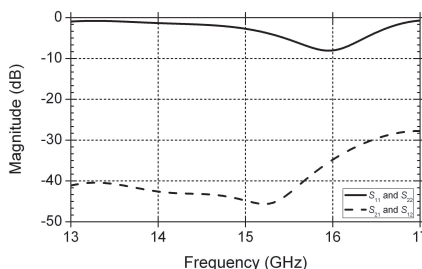

**Figure 6.** Reflection and isolation coefficients of the un-optimized dual-polarized patch.

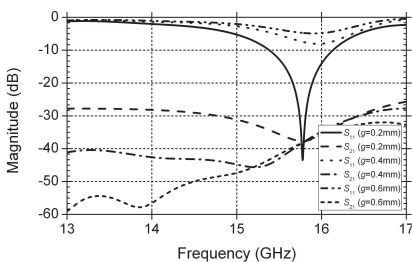

(a)

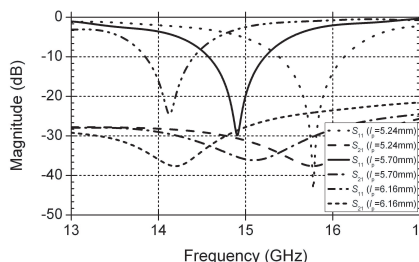

(b)

**Figure 7.** Parametric analysis of the dual-polarized patch by changing. (a) Gap width and (b) patch length.

The parametric studies are carried out to find the effect of the patch length and the gap width as shown in Fig. 7, from which we derive a method of antenna optimization. First, the antenna impedance matching is achieved by adjusting the gap width, and then we adjust the patch length to obtain a resonance at the desired frequency. Final dimensions of the proposed antenna are summarized in Table 1.

**Table 1.** Dimensions of the proposed antenna.

Parameters	Designation	Dimensions (mm)
Substrate material	Glass-reinforced Teflon	$\epsilon_r = 2.5, \tan \delta = 0.001$
Substrate size	$w \times l \times h$	$45.0 \times 40.00 \times 0.787$
Patch width	$w_p$	4.00
Patch length	$l_p$	5.70
Gap width	$g$	0.20
Microstrip line width	$w_m$	2.26
Microstrip line length	$l_{m1}$	16.95
	$l_{m2}$	19.45

### 3. MEASUREMENTS

The proposed antenna is fabricated and its performance is measured and compared with the simulation. The fabricated antenna is shown in Fig. 8, where the antenna circuit board is placed on a metal block and coaxial-to-microstrip adaptors are used to connect the antenna to test equipments. Such performance of the fabricated antenna as gain, reflection coefficient, port isolation and radiation patterns are measured using a network analyzer (HP 8720C) and far-field antenna test instruments in an anechoic chamber.

Figure 9 shows a comparison of the measured and simulated reflection coefficients and port isolations of the proposed antenna. Measured results agree well with the simulation. The reflection coefficient of the antenna is less than  $-10$  dB and the port isolation is greater than 30 dB over 14.5–15.2 GHz. In [4] and [6], the port isolation in a dual-polarized patch is 28 dB and 20 dB respectively.

Figure 10 shows gain patterns at 14.9 GHz with the antenna excited at port 1 and the port 2 connected to a matched load. The proposed antenna's gain is 6.2 dBi, and its 3-dB beamwidths are  $109^\circ$  and  $62^\circ$  in vertical and horizontal planes, respectively. Measured gain patterns agree with the simulation in the upper hemisphere, where the maximum error in gain is 2.5 dB.




Figure 8. Fabricated antenna.

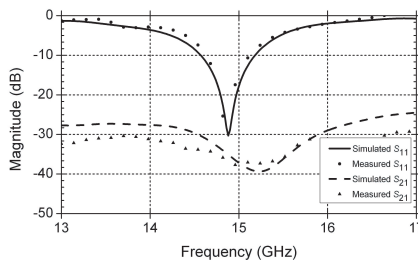


Figure 9. Reflection and isolation performances of the fabricated antenna.

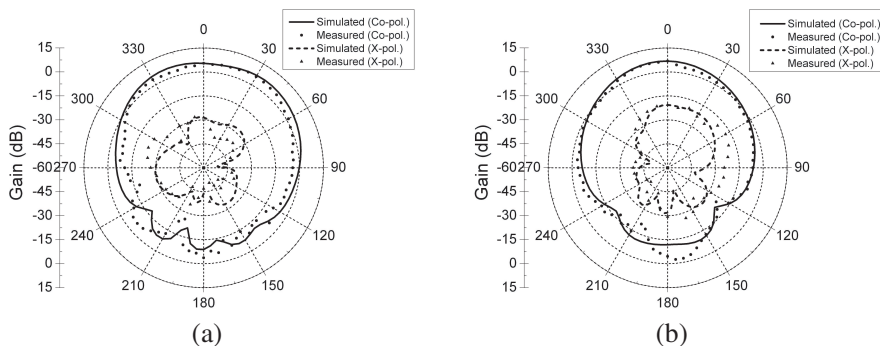


Figure 10. Gain patterns of the fabricated antenna at 14.9 GHz on (a) vertical and (b) horizontal planes.

#### 4. CONCLUSION

In this paper, we proposed a new compact dual-polarized microstrip patch antenna. Dual-polarized radiation, good impedance matching, high port-isolation, and compactness of feeding are achieved by feeding a rectangular patch with two orthogonal gaps between the patch edge and a microstrip open end. The impedance matching property of the gap is analyzed using the equivalent circuit representation of the antenna. The patch length and gap width are adjusted to obtain the final optimized antenna. The designed antenna is fabricated and tested. Measurements of the fabricated antenna show that the proposed antenna has a gain of 6.2 dBi, 3-dB beamwidths of 109° and 62° in vertical and horizontal planes, respectively, at 14.9 GHz. The reflection coefficient is less than -10 dB and the port isolation is greater than 30 dB over 14.5–15.2 GHz. The dual-polarized patch

antenna proposed in this paper can be utilized in such applications as dual-polarized reflector antenna feeds and dual-polarized patch arrays where the feed circuit of the radiating element needs to be realized in a minimum space.

## ACKNOWLEDGMENT

This research was supported by the Basic Science Research Program through the National Research Foundation of Korea (NRF) funded by the Ministry of Education, Science and Technology (2010-0001733).

## REFERENCES

1. Chen, W.-L. and G.-M. Wang, "Small size edge-fed Sierpinski carpet microstrip patch antenna," *Progress In Electromagnetics Research C*, Vol. 3, 195–202, 2008.
2. Gosh, S., A. Roy, and A. Chakrabarty, "Estimation of antenna factor of microstrip patch antenna as EMI sensor," *Progress In Electromagnetics Research Letters*, Vol. 3, 113–122, 2008.
3. Mandal, D., R. S. Kar, and A. K. Bhattacharjee, "Input impedance of rectangular microstrip antennas on non-radiating edges for different feed sizes," *Progress In Electromagnetics Research C*, Vol. 1, 191–198, 2008.
4. Notis, D. T., P. C. Liakou, and D. P. Chrissoulidis, "Dual polarised microstrip patch antenna reduced in size by use of peripheral slits," *Proc. 34th European Microw. Conf.*, Vol. 1, 125–128, 2004.
5. Binu, P., S. Mridula, C.-K. Aanandan, K. Vasudevan, and P. Mohanan, "Electromagnetically coupled dual port dual band octagonal patch antenna," *Proc. IEEE Int. Conf. Personal Wireless Comm.*, 305–307, 2005.
6. Min, K.-S., S.-H. Park, D.-C. Kim, and H. Arai, "Microstrip patch antenna with dual resonance and dual polarization," *Proc. Asia Pacific Microw. Conf.*, Vol. 1, 158–161, 1999.
7. Simons, R. N., "Suspended rectangular/circular patch antennas with electromagnetically coupled inverted microstrip feed for dual polarization frequency," *Proc. IEEE Int. Antennas Propog. Symp.*, Vol. 4, 2204–2207, 2000.
8. Caso, R., A. Buffi, M. R. Pino, and R. Nepa, "A novel dual-feed slot-coupling feeding technique for circularly polarized patch arrays," *IEEE Microw. Wireless Comp. Lett.*, Vol. 9, 183–186, 2010.



9. Gao, X., H. Zhong, Z. Feng, and M. F. Iskander, "Low-profile planar tripolarization antenna for WLAN communications," *IEEE Microw. Wireless Comp. Lett.*, Vol. 9, 83–86, 2010.
10. Yu, C.-C. and K. Chang,, "Transmission-line analysis of a capacitively coupled microstrip ring resonator," *IEEE Trans. Microw. Theory Tech.*, Vol. 45, No. 11, 2018–2024, 1997.
11. Jung, W., Y. Woo, and C. Ha, "Modified inset fed microstrip patch antenna," *Proc. Asia Pacific Microw. Conf.*, Vol. 3, 1346–1349, 2001.
12. Koster, N. H. L. and R. H. Jansen, "The equivalent circuit of the asymmetric series gap in microstrip and suspended substrate lines," *IEEE Trans. Microw. Theory Tech.*, Vol. 30, 1273–1279, 1982.
13. Kirschning, M., R. H. Jansen, and N. H. L. Koster, "Measurement and computer-aided modeling of microstrip discontinuities by an improved resonator method," *Proc. IEEE Int. MTT-S Symp.*, Vol. 83, 495–497, 1983.
14. Balanis, C. A., *Antenna Theory: Analysis and Design*, 811–862, Wiley, New York, 2005.
15. Hoffmann, R. K., *Handbook of Microwave Integrated Circuits*, 185–186, Artech House, Boston, 1987.
16. Edwards, T., *Foundations for Microstrip Circuit Design*, 2nd edition, 107–108, John Wiley, New York, 1992.