

A NOVEL ADAPTIVE BEAMFORMING TECHNIQUE APPLIED ON LINEAR ANTENNA ARRAYS USING ADAPTIVE MUTATED BOOLEAN PSO

Z. D. Zaharis^{1, *} and **T. V. Yioultis**²

¹Telecommunications Center, Aristotle University of Thessaloniki, Thessaloniki 54124, Greece

²Department of Electrical and Computer Engineering, Aristotle University of Thessaloniki, Thessaloniki 54124, Greece

Abstract—The present work introduces a new optimization technique suitable for adaptive beamforming of linear antenna arrays. The proposed technique is a new PSO variant called Adaptive Mutated Boolean PSO (AMBPSO) where the update formulae are implemented exclusively in Boolean form by using an efficiently adaptive mutation process. The AMBPSO aims at estimating the excitation weights applied on the array elements considering that a desired signal and several interference signals are received by the array at respective directions of arrival. In order to exhibit the robustness of the technique, the optimization process does not take into account the interference correlation matrix. A certain power level of additive Gaussian noise is also considered by the technique. The AMBPSO has been applied in several cases of uniform linear antenna arrays with different spacing between adjacent elements and different noise power level and therefore seems to be quite promising in the smart antenna technology.

1. INTRODUCTION

The analysis and design of antenna arrays are very important and challenging issues in communications industry. So far, many techniques have been studied and developed in order to design arrays that satisfy specific requirements [1–9]. Due to the demanding applications in modern communications, the radiation pattern of base station arrays must be dynamically shaped according to certain requirements. Specifically, the peak of the main lobe must be steered towards a

Received 19 April 2011, Accepted 25 May 2011, Scheduled 5 June 2011

* Corresponding author: Zaharias D. Zaharis (zaharis@auth.gr).

desired signal called signal-of-interest (SOI). On the contrary, pattern nulls must be formed in the directions of arrival (DOA) of interference or undesired signals. Antennas operating under the above requirements are called smart antennas [10–17] and the techniques used to calculate the excitation weights that produce the above-defined radiation pattern are called adaptive beamforming (ABF) techniques [18–25].

Most of the ABF techniques proposed so far try to recover the degradation in their performance caused by mismatches between the assumed and the actual conditions. A usual kind of mismatch is the steering vector uncertainty which is taken into account by a well-known ABF technique named robust Capon beamforming (RCB) [21]. However, the performance decrease caused by uncertainty in the interference correlation matrix is a major issue that needs careful consideration. Therefore, an ABF technique insensitive to that type of uncertainty would be desirable.

The present study introduces a new optimization technique suitable for adaptive beamforming of antenna arrays. This technique is a new variant of Particle Swarm Optimization (PSO) called Adaptive Mutated Boolean PSO (AMBPSO). The conventional PSO and all its variants are based on an update mechanism, where real number expressions are used. However, the update mechanism in the AMBPSO is implemented exclusively in Boolean form using an effectively adaptive mutation process. Both the Boolean update and the adaptive mutation process make the AMBPSO a robust technique.

The AMBPSO is utilized here as an ABF technique applied to uniform linear arrays (ULAs). The technique assumes a desired signal and several interference signals, all uncorrelated with each other, received by the array at respective directions of arrival. These directions are considered to be already estimated by well-known DOA algorithms [10, 11, 26–31]. A certain power level of additive Gaussian noise is also taken into account. The optimal excitation weights applied on the elements of the ULA are extracted by minimizing a suitably chosen fitness function F . In order to exhibit the robustness of the technique, the optimization process does not take into account the interference correlation matrix. In that manner, we try to develop a technique which does not depend on the knowledge of the interference signals but only on the knowledge of their DOA.

2. FORMULATION

Assume an M -element ULA that receives a SOI $s(k)$ arriving from angle θ_0 and N interference signals $i_n(k)$ arriving from different angles θ_n ($n = 1, \dots, N$) (see Figure 1). Each angle is called angle of arrival

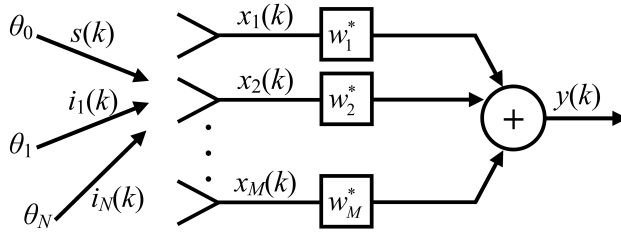


Figure 1. M -element uniform linear array.

(AOA) and defines a signal DOA with respect to a reference direction normal to the array axis. The parameter k denotes the k -th time sample. Each element is considered to be an isotropic source, while all the arriving signals are monochromatic with $N < M$. The received signal $x_m(k)$ at the input of every m -th element ($m = 1, \dots, M$) includes additive, zero mean, Gaussian noise $n_m(k)$ with variance σ^2 . Thus, the input vector is:

$$\begin{aligned} \bar{x}(k) &= \bar{a}_0 s(k) + [\bar{a}_1 \quad \bar{a}_2 \quad \dots \quad \bar{a}_N] \begin{bmatrix} i_1(k) \\ i_2(k) \\ \vdots \\ i_N(k) \end{bmatrix} + \bar{n}(k) \\ &= \bar{a}_0 s(k) + \bar{A}\bar{i}(k) + \bar{n}(k) = \bar{d}(k) + \bar{u}(k) \end{aligned} \tag{1}$$

where $\bar{a}_n = [1 \quad e^{j\frac{2\pi}{\lambda}q \sin \theta_n} \quad \dots \quad e^{j(M-1)\frac{2\pi}{\lambda}q \sin \theta_n}]^T$ ($n = 0, 1, \dots, N$) is the array steering vector of the θ_n AOA, \bar{A} is the $M \times N$ matrix of steering vectors \bar{a}_n , $\bar{i}(k)$ is the vector of the N uncorrelated interference signals $i_n(k)$, $\bar{n}(k)$ is the vector of the M uncorrelated noise signals $n_m(k)$, and q is the spacing between adjacent elements of the ULA. Also, the vector $\bar{d}(k) = \bar{a}_0 s(k)$ represents the desired input signals, while the vector $\bar{u}(k) = \bar{A}\bar{i}(k) + \bar{n}(k)$ represents the undesired (interference plus noise) input signals. Finally, the superscript T denotes the transpose operation.

The array output is given by the form:

$$y(k) = \bar{w}^H \bar{x}(k) = \bar{w}^H \bar{d}(k) + \bar{w}^H \bar{u}(k) \tag{2}$$

where $\bar{w} = [w_1 \quad w_2 \quad \dots \quad w_M]^T$ is the vector of excitation weights and the superscript H denotes the Hermitian transpose operation.

The array output power for the desired signal is given by:

$$\sigma_d^2 = E \left[|\bar{w}^H \bar{d}(k)|^2 \right] = E \left[|\bar{w}^H \bar{a}_0 s(k)|^2 \right] = S \bar{w}^H \bar{a}_0 \bar{a}_0^H \bar{w} \tag{3}$$

where $S = E[|s(k)|^2]$ is mean power of SOI. Also, the array output power for the undesired signal is given by:

$$\begin{aligned}\sigma_u^2 &= E\left[|\bar{w}^H \bar{u}(k)|^2\right] = E\left[|\bar{w}^H [\bar{A}\bar{i}(k) + \bar{n}(k)]|^2\right] \\ &= \bar{w}^H \bar{A} \bar{R}_{ii} \bar{A}^H \bar{w} + \bar{w}^H \bar{R}_{nn} \bar{w}\end{aligned}\quad (4)$$

where $\bar{R}_{ii} = E[\bar{i}(k)\bar{i}^H(k)]$ is the interference correlation matrix and $\bar{R}_{nn} = E[\bar{n}(k)\bar{n}^H(k)]$ is the noise correlation matrix. Taking into account that $n_m(k)$ ($m = 1, \dots, M$) are uncorrelated, zero mean, Gaussian noise signals with variance σ^2 , we get $\bar{R}_{nn} = \sigma^2 I$. Therefore, (4) can be written as:

$$\sigma_u^2 = \bar{w}^H \bar{A} \bar{R}_{ii} \bar{A}^H \bar{w} + \sigma^2 \bar{w}^H \bar{w}\quad (5)$$

Finally, the signal-to-interference-plus-noise ratio is given by:

$$SINR = \frac{\sigma_d^2}{\sigma_u^2} = \frac{S \bar{w}^H \bar{a}_0 \bar{a}_0^H \bar{w}}{\bar{w}^H \bar{A} \bar{R}_{ii} \bar{A}^H \bar{w} + \sigma^2 \bar{w}^H \bar{w}}\quad (6)$$

The fitness function F can be simply defined as the inverse of $SINR$. As F is minimized, $SINR$ is maximized, which means that the peak of the main lobe is steered towards the SOI and pattern nulls are formed in the directions of arrival of all the interference signals. In order to make our technique work without the knowledge of \bar{R}_{ii} and S , we assume that $\bar{R}_{ii} = I$ and $S = 1$. Then, F can be defined by the form:

$$F = \frac{\bar{w}^H \bar{A} \bar{A}^H \bar{w} + \sigma^2 \bar{w}^H \bar{w}}{\bar{w}^H \bar{a}_0 \bar{a}_0^H \bar{w}}\quad (7)$$

It is obvious from (7) that the minimization of F performed by the AMBPSO does not depend on the knowledge of \bar{R}_{ii} but only on the knowledge of the interference DOA. The value of σ^2 can be calculated from the signal-to-noise ratio SNR in dB as follows:

$$\sigma^2 = 10^{-SNR/10}\quad (8)$$

The proposed technique is compared to an efficient well-known ABF technique called Minimum Variance Distortionless Response (MVDR) which is a variant of RCB technique [11]. The MVDR beamformer seeks for the optimum weight vector \bar{w} that minimizes the power of the undesired output signal while the desired output signal is maintained. Therefore, \bar{w} is calculated by minimizing the quantity $\bar{w}^H \bar{R}_{uu} \bar{w}$, while $\bar{w}^H \bar{a}_0 = 1$. The optimum \bar{w} is given by:

$$\bar{w}_{mvdr} = \frac{\bar{R}_{uu}^{-1} \bar{a}_0}{\bar{a}_0^H \bar{R}_{uu}^{-1} \bar{a}_0}\quad (9)$$

where $\bar{R}_{uu} = E[\bar{u}(k)\bar{u}^H(k)]$ is the correlation matrix of $\bar{u}(k)$.

3. ADAPTIVE MUTATED BOOLEAN PSO

PSO can be found in many studies in the literature [14, 32–36]. A brief description of PSO is given in [32]. The Boolean PSO (BPSO) is a binary version of PSO [37] based on the swarm behavior as well. The AMBPSO is an improved version of BPSO proposed by the authors.

In the AMBPSO, the position $\bar{x}_n = [x_{n1} \dots x_{nb} \dots x_{nB}]$ and the velocity $\bar{v}_n = [v_{n1} \dots v_{nb} \dots v_{nB}]$ of every n -th ($n = 1, \dots, N_P$) particle of the swarm are represented as binary strings of B bits. Every position \bar{x}_n must be inside the search space defined by a lower and an upper boundary, respectively \bar{l}_n and \bar{u}_n . If a particle goes outside the search space, a large fitness value is assigned as a penalty to the particle. Since the AMBPSO aims at minimizing the fitness function, these particles are gradually moved inside the search space.

The update of \bar{v}_n and \bar{x}_n is made by using “and”, “or” and “xor” operators:

$$v_{nb} = c_1 \cdot v_{nb} + c_2 \cdot (p_{nb} \oplus x_{nb}) + c_3 \cdot (g_b \oplus x_{nb}) \quad (10)$$

$$x_{nb} = x_{nb} \oplus v_{nb} \quad (11)$$

where p_{nb} is the b -th bit of the best position \bar{p}_n achieved so far by the n -th particle and g_b is the b -th bit of the best position \bar{g} achieved so far by the swarm. In addition, c_1 , c_2 , and c_3 are random bits with probabilities of being ‘1’ respectively equal to C_1 , C_2 , and C_3 . The exclusively Boolean update of \bar{v}_n and \bar{x}_n makes the AMBPSO more efficient than the popular binary PSO version of [38], where the velocity update is made by using a real number expression.

In order to control the convergence speed of the process, the AMBPSO utilizes a parameter v_{\max} called maximum allowed velocity and defined as the maximum number of ‘1’s allowed in \bar{v}_n . The actual number of ‘1’s in \bar{v}_n is the “velocity length” $l(\bar{v}_n)$ and is controlled by the “negative selection” (NS), which is a basic mechanism of Artificial Immune Systems (AISs) [37]. AISs are inspired by the biological immune systems. The NS is responsible for eliminating T -cells that recognize self antigens in the thymus. According to the NS, \bar{v}_n is considered as self antigen when $l(\bar{v}_n) > v_{\max}$ and then randomly chosen ‘1’s in \bar{v}_n change into ‘0’s until $l(\bar{v}_n) = v_{\max}$. If $l(\bar{v}_n) \leq v_{\max}$, \bar{v}_n is considered as non-self antigen and is not changed.

In order to increase the exploration ability of the particles, after the completion of the NS, an adaptive mutation process is applied by changing the ‘0’s of every \bar{v}_n to ‘1’s with “mutation probability” m . The mutation process starts from relatively small values of m to avoid pure random search. In every iteration, m undergoes a linear reduction until it reaches zero at the end of the optimization process.

The reduction in the values of m provides the AMBPSO with the adaptation feature.

The AMBPSO is a technique of high computational complexity like all the other evolutionary techniques and thus needs much more CPU time than the MVDR technique to find an optimal solution. In the cases studied here, an Intel Core 2 Duo computer was used and the CPU time per execution was measured around 2 seconds. However, this problem can be overcome by using Graphics Processing Units (GPUs), which provide cheap access to high-performance parallel computing resources and make the algorithm execution 10–100 times faster [25].

A brief description of the AMBPSO algorithm is given below:

1. Choose the values of N_P , B , C_1 , C_2 , C_3 , v_{\max} , m , \bar{l}_n and \bar{u}_n ($n = 1, \dots, N_P$), and the maximum number of iterations T_{\max} of the optimization process.
2. Initialize random values for \bar{v}_n ($n = 1, \dots, N_P$) and apply the NS to correct them. Also, initialize random values for \bar{x}_n ($n = 1, \dots, N_P$) inside the search space and calculate their fitness values $F(\bar{x}_n)$.
3. Set $\bar{p}_n = \bar{x}_n$ and $F(\bar{p}_n) = F(\bar{x}_n)$ ($n = 1, \dots, N_P$).
4. Find $F_{\min} = F(\bar{g})$ among $F(\bar{p}_n)$ ($n = 1, \dots, N_P$).
5. Update \bar{v}_n ($n = 1, \dots, N_P$) using (10) and apply NS to correct them.
6. Mutate the '0's of \bar{v}_n ($n = 1, \dots, N_P$) according to the value of m .
7. Update \bar{x}_n ($n = 1, \dots, N_P$) using (11).
8. Calculate the fitness values $F(\bar{x}_n)$ ($n = 1, \dots, N_P$).
9. Assign a large fitness value for \bar{x}_n lying outside the search space.
10. For $n = 1, \dots, N_P$, if $F(\bar{x}_n) < F(\bar{p}_n)$ then $\bar{p}_n = \bar{x}_n$.
11. For $n = 1, \dots, N_P$, if $F(\bar{p}_n) < F(\bar{g})$ then $\bar{g} = \bar{p}_n$.
12. Reduce the value of m according to a linear decrease expression.
13. If T_{\max} is not reached, repeat the algorithm from step (5), or else report results and terminate.

4. NUMERICAL RESULTS

The AMBPSO algorithm was applied on a 10-element ULA. The parameters used by the algorithm were: $N_P = 20$, $C_1 = 0.1$, $C_2 = C_3 = 0.5$, $v_{\max} = 4$, $m = 0.10$, and $T_{\max} = 10000$. The ULA receives a SOI arriving from angle $\theta_0 = 30^\circ$ and 8 interference signals arriving from respective angles $\theta_n \in \{-70^\circ, -40^\circ, -30^\circ, -10^\circ, 0^\circ, 10^\circ, 50^\circ, 70^\circ\}$. All the above signals are uncorrelated with each other. Four cases

are studied with different spacing q between adjacent elements and different SNR . In the first case, $SNR = 30$ dB and $q = 0.5\lambda$ which is the usual spacing for most of the ABF techniques. In the second case, our technique is tested for $q \neq 0.5\lambda$. Therefore, q is set to 0.6λ , while $SNR = 30$ dB. In order to explore the efficiency of our technique for smaller and larger values of SNR , two more cases are studied. In the third case, $SNR = 15$ dB and $q = 0.5\lambda$, and in the fourth case $SNR = 50$ dB and $q = 0.5\lambda$.

Initially, the AMBPSO was compared to the conventional BPSO in terms of convergence. Both algorithms use the same fitness function F given in (7). For each case, the AMBPSO and BPSO algorithms were executed 100 times in order to derive comparative graphs that depict

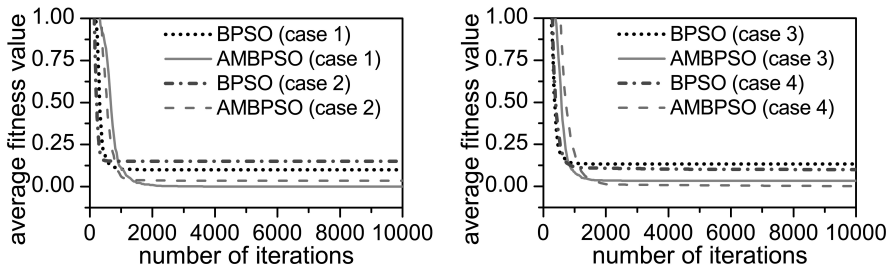


Figure 2. Comparative convergence graphs.

Table 1. Optimal weight values for $q = 0.5\lambda$ and $SNR = 30$ dB.

m	w_{mvdr}	w_{ambps0}	m	w_{mvdr}	w_{ambps0}
1	$0.352 - j0.227$	$0.191 + j0.197$	6	$0.342 + j0.940$	$0.070 + j1.033$
2	$0.017 + j0.405$	$-0.195 + j0.490$	7	$-0.921 + j0.101$	$-0.905 + j0.228$
3	$-0.750 + j0.152$	$-0.692 - j0.202$	8	$-0.114 - j0.757$	$-0.214 - j0.622$
4	$-0.220 - j0.900$	$0.165 - j0.983$	9	$0.386 - j0.122$	$0.435 - j0.239$
5	$1.000 + j0$	$1.000 + j0$	10	$-0.092 + j0.409$	$0.144 + j0.096$

Table 2. Optimal weight values for $q = 0.6\lambda$ and $SNR = 30$ dB.

m	w_{mvdr}	w_{ambps0}	m	w_{mvdr}	w_{ambps0}
1	$0.387 - j0.377$	$0.316 - j0.104$	6	$0.392 + j0.920$	$0.181 + j1.010$
2	$0.483 - j0.070$	$0.252 + j0.256$	7	$-0.738 - j0.412$	$-0.767 - j0.202$
3	$-0.711 + j0.223$	$-0.722 + j0.095$	8	$-0.073 - j0.741$	$-0.025 - j0.717$
4	$-0.668 - j0.518$	$-0.369 - j0.782$	9	$0.124 + j0.472$	$0.223 + j0.159$
5	$1.000 + j0$	$1.000 + j0$	10	$-0.195 + j0.503$	$-0.089 + j0.285$

the average convergence of F (see Figure 2). Although the AMBPSO converges a little slower than the BPSO, it finally gives better solutions.

Then, the AMBPSO was compared with the MVDR technique. The optimal excitation weights of the four cases are given respectively in Tables 1–4, while the radiation patterns are shown respectively in Figures 3–6. All the cases show the superiority of the AMBPSO algorithm over a robust ABF technique such as the MVDR. Both

Table 3. Optimal weight values for $q = 0.5\lambda$ and $SNR = 15$ dB.

m	w_{mvdr}	w_{ambpso}	m	w_{mvdr}	w_{ambpso}
1	$0.354 - j0.226$	$0.303 + j0.030$	6	$0.340 + j0.940$	$0.195 + j1.020$
2	$0.018 + j0.407$	$-0.093 + j0.476$	7	$-0.922 + j0.100$	$-0.901 + j0.171$
3	$-0.751 + j0.152$	$-0.752 - j0.053$	8	$-0.113 - j0.758$	$-0.153 - j0.671$
4	$-0.219 - j0.901$	$-0.011 - j0.986$	9	$0.389 - j0.122$	$0.405 - j0.192$
5	$1.000 + j0$	$1.000 + j0$	10	$-0.092 + j0.410$	$0.010 + j0.210$

Table 4. Optimal weight values for $q = 0.5\lambda$ and $SNR = 50$ dB.

m	w_{mvdr}	w_{ambpso}	m	w_{mvdr}	w_{ambpso}
1	$0.352 - j0.227$	$0.213 + j0.034$	6	$0.342 + j0.940$	$0.159 + j0.978$
2	$0.017 + j0.405$	$-0.127 + j0.442$	7	$-0.921 + j0.101$	$-0.921 + j0.185$
3	$-0.750 + j0.152$	$-0.683 - j0.072$	8	$-0.114 - j0.757$	$-0.190 - j0.678$
4	$-0.220 - j0.900$	$0.036 - j0.921$	9	$0.386 - j0.122$	$0.427 - j0.194$
5	$1.000 + j0$	$1.000 + j0$	10	$-0.092 + j0.409$	$0.086 + j0.226$

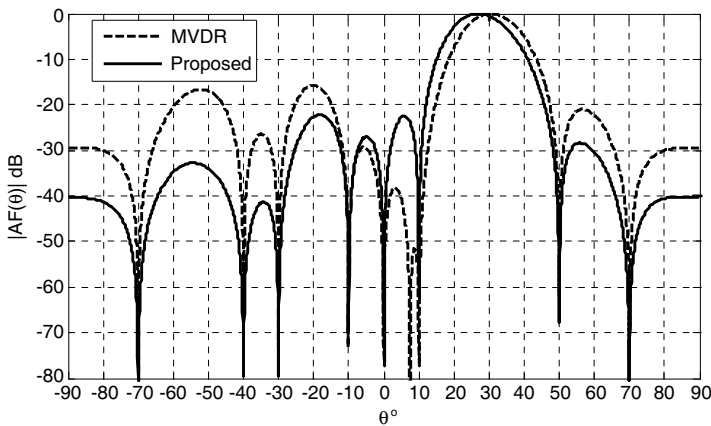


Figure 3. Optimal radiation patterns for $q = 0.5\lambda$ and $SNR = 30$ dB.

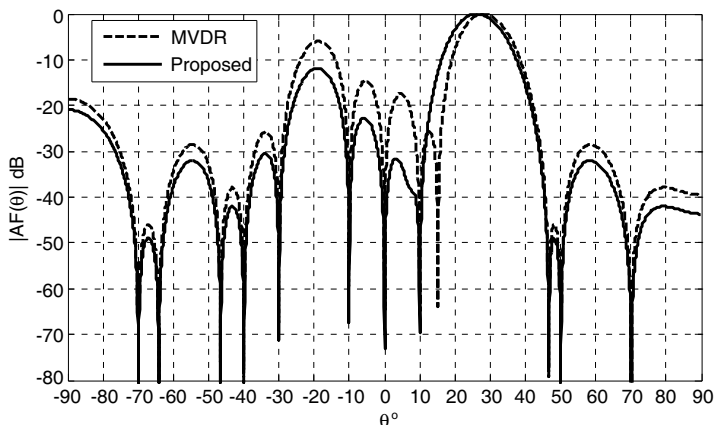


Figure 4. Optimal radiation patterns for $q = 0.6\lambda$ and $SNR = 30$ dB.

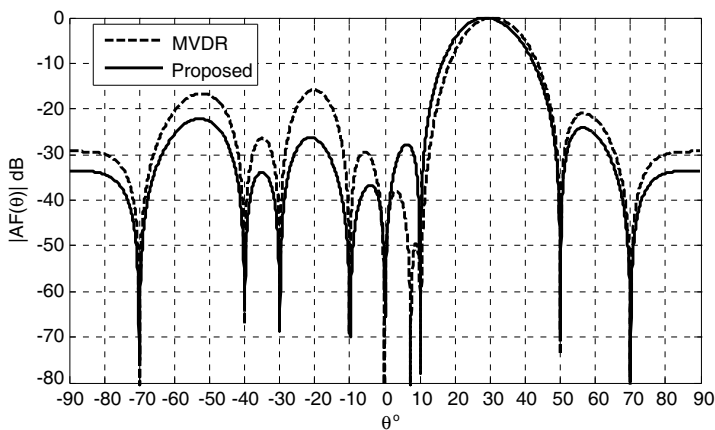


Figure 5. Optimal radiation patterns for $q = 0.5\lambda$ and $SNR = 15$ dB.

techniques succeed to steer the peak of the main lobe towards the SOI and form pattern nulls in the DOA of every interference signal. However, the AMBPSO provides deeper nulls and that's why all the radiation patterns produced by the AMBPSO have lower side lobe level (SLL) than the patterns produced by the MVDR technique. In order to achieve specific values of SLL for certain angular regions, a properly defined term must be added to the fitness function F . Of course, the additional term increases the CPU time required by the AMBPSO to find an optimal solution.

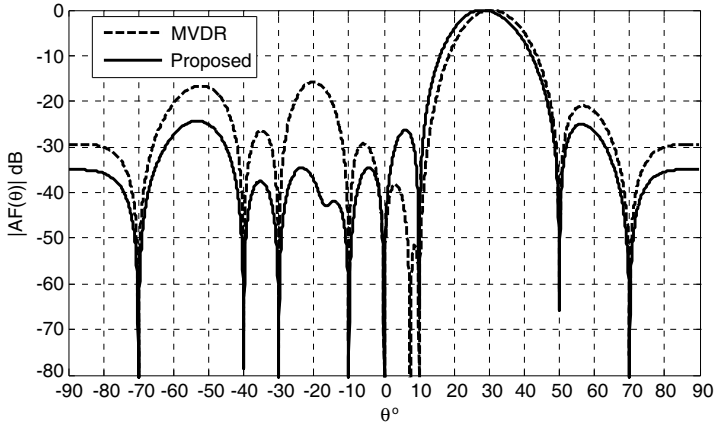


Figure 6. Optimal radiation patterns for $q = 0.5\lambda$ and $SNR = 50$ dB.

Table 5. $SINR$ derived from MVDR and AMBPSO for various values of SNR , considering a 10-element ULA with $q = 0.5\lambda$.

SNR (dB)	$SINR$ (dB) derived from MVDR	$SINR$ (dB) derived from AMBPSO			
		Best	Worst	Mean	STD
-20	-10.0540	-10.0522	-10.0548	-10.0523	0.0004
-15	-5.1601	-5.1395	-5.1512	-5.1399	0.0020
-10	-0.3701	-0.2975	-0.3692	-0.2998	0.0098
-5	4.3345	4.5321	4.3422	4.5269	0.0218
0	8.8967	9.4241	8.5481	9.3749	0.1643
5	13.4522	14.3768	12.0647	14.2676	0.3628
10	18.2011	19.3598	15.1371	19.2810	0.4463
15	22.6889	24.3542	16.5370	24.1008	1.0643
20	27.3035	29.3509	17.2416	29.0332	1.2290
25	31.7012	34.3515	22.4314	33.6680	1.4163
30	36.4811	39.3341	30.2715	38.7648	0.8722
35	40.4633	44.3440	32.6393	43.1564	1.5287
40	45.2813	49.3461	36.6898	48.1781	1.2409
45	49.3217	54.3358	43.2386	52.5134	1.5788
50	54.8269	59.3317	47.6499	58.3221	1.7439
55	59.1356	64.3458	52.7630	63.0660	1.6119
60	63.4345	69.3468	56.3379	67.5858	1.8369

Finally, the AMBPSO is compared in terms of $SINR$ with the MVDR technique for various SNR values considering a 10-element ULA with $q = 0.5\lambda$. For each value of SNR , the AMBPSO algorithm is executed 100 times and statistical results concerning the $SINR$ are extracted (see Table 5). The results show low standard deviation and mean values of $SINR$ close to the respective best values. Therefore, the AMBPSO algorithm seems to have stable and good performance regardless of the SNR values. In addition, the mean $SINR$ achieved by the AMBPSO is always greater than the $SINR$ achieved by the MVDR technique, and their difference increases with increasing SNR .

5. CONCLUSION

The cases studied in the present work show that the AMBPSO converges a little slower than the conventional BPSO, but it finally leads to better solutions. Also, the AMBPSO can be used as an efficient ABF technique capable of producing radiation patterns better than patterns produced by a robust ABF technique such as the MVDR. The AMBPSO succeeds not only to steer the main lobe towards the SOI and form nulls in the DOA of all the interference signals but also to reduce the SLL more than the MVDR technique does. As an ABF technique, the AMBPSO does not need the knowledge of the interference correlation matrix but only the knowledge of the interference DOA. In addition, the AMBPSO algorithm exhibits stable and good behavior for every value of SNR , providing better $SINR$ values than those obtained by the MVDR technique. By using GPUs, the computational complexity can be overcome and then the AMBPSO algorithm can be used by adaptive beamforming networks in real-time applications. Therefore, the AMBPSO seems to be quite promising in the smart antenna technology. As a future work, the AMBPSO will be applied on more complex fitness functions in order not only to control the pattern nulls but also to achieve specific values of SLL.

REFERENCES

1. Bucci, O. M., T. Isernia, and A. F. Morabito, "A deterministic approach to the synthesis of pencil beams through planar thinned arrays," *Progress In Electromagnetics Research*, Vol. 101, 217–230, 2010.
2. Kamarudin, M. R. B., P. S. Hall, F. Colombel, and M. Himdi, "Electronically switched beam disk-loaded monopole array antenna," *Progress In Electromagnetics Research*, Vol. 101, 339–347, 2010.

3. Siakavara, K., "Novel fractal antenna arrays for satellite networks: Circular ring sierpinski carpet arrays optimized by genetic algorithms," *Progress In Electromagnetics Research*, Vol. 103, 115–138, 2010.
4. Liu, Y., Z.-P. Nie, and Q. H. Liu, "A new method for the synthesis of non-uniform linear arrays with shaped power patterns," *Progress In Electromagnetics Research*, Vol. 107, 349–363, 2010.
5. Alvarez Folgueiras, M., J. A. Rodriguez Gonzalez, and F. J. Ares-Pena, "Pencil beam patterns obtained by planar arrays of parasitic dipoles FED by only one active element," *Progress In Electromagnetics Research*, Vol. 103, 419–431, 2010.
6. Zhao, X.-W., Y. Zhang, H.-W. Zhang, D. G. Donoro, S.-W. Ting, T. K. Sarkar, and C.-H. Liang, "Parallel MoM-PO method with out-of-core technique for analysis of complex arrays on electrically large platforms," *Progress In Electromagnetics Research*, Vol. 108, 1–21, 2010.
7. Bakhtafrooz, A., A. Borji, D. Busuioc, and S. Safavi-Naeini, "Novel two-layer millimeter-wave slot array antennas based on substrate integrated waveguides," *Progress In Electromagnetics Research*, Vol. 109, 475–491, 2010.
8. Litman, A., J.-M. Geffrin, and H. Tortel, "On the calibration of a multistatic scattering matrix measured by a fixed circular array of antennas," *Progress In Electromagnetics Research*, Vol. 110, 1–21, 2010.
9. Wang, Q. and Q.-Q. He, "An arbitrary conformal array pattern synthesis method that include mutual coupling and platform effects," *Progress In Electromagnetics Research*, Vol. 110, 297–311, 2010.
10. Godara, L. C., *Smart Antennas*, CRC Press, Boca Raton, FL, 2004.
11. Gross, F. B., *Smart Antennas for Wireless Communications with Matlab*, McGraw-Hill, New York, 2005.
12. Zhang, X., X. Gao, and Z. Wang, "Blind paralind multiuser detection for smart antenna CDMA system over multipath fading channel," *Progress In Electromagnetics Research*, Vol. 89, 23–38, 2009.
13. Benedetti, M., G. Oliveri, P. Rocca, and A. Massa, "A fully-adaptive smart antenna prototype: Ideal model and experimental validation in complex interference scenarios," *Progress In Electromagnetics Research*, Vol. 96, 173–191, 2009.
14. Ho, M.-H., S.-H. Liao, and C.-C. Chiu, "A novel smart UWB

- antenna array design by PSO,” *Progress In Electromagnetics Research C*, Vol. 15, 103–115, 2010.
15. Liao, S.-H., M.-H. Ho, and C.-C. Chiu, “Bit error rate reduction for multiusers by smart UWB antenna array,” *Progress In Electromagnetics Research C*, Vol. 16, 85–98, 2010.
 16. Chiu, C.-W., C.-H. Chang, and Y.-J. Chi, “A meandered loop antenna for LTE/WWAN operations in a smart phone,” *Progress In Electromagnetics Research C*, Vol. 16, 147–160, 2010.
 17. Viani, F., L. Lizzi, M. Donelli, D. Pregolato, G. Oliveri, and A. Massa, “Exploitation of parasitic smart antennas in wireless sensor networks,” *Journal of Electromagnetic Waves and Applications*, Vol. 24, No. 7, 993–1003, 2010.
 18. Liang, G., W. Gong, H. Liu, and J. Yu, “Development of 61-channel digital beamforming (DBF) transmitter array for mobile satellite communication,” *Progress In Electromagnetics Research*, Vol. 97, 177–195, 2009.
 19. Umrani, A. W., Y. Guan, and F. A. Umrani, “Effect of steering error vector and angular power distributions on beamforming and transmit diversity systems in correlated fading channel,” *Progress In Electromagnetics Research*, Vol. 105, 383–402, 2010.
 20. Byrne, D., M. O’Halloran, M. Glavin, and E. Jones, “Data independent radar beamforming algorithms for breast cancer detection,” *Progress In Electromagnetics Research*, Vol. 107, 331–348, 2010.
 21. Li, J. and P. Stoica, *Robust Adaptive Beamforming*, John Wiley & Sons, Inc., Hoboken, New Jersey, 2006.
 22. Li, Y., Y.-J. Gu, Z.-G. Shi, and K. S. Chen, “Robust adaptive beamforming based on particle filter with noise unknown,” *Progress In Electromagnetics Research*, Vol. 90, 151–169, 2009.
 23. Castaldi, G., V. Galdi, and G. Gerini, “Evaluation of a neural-network-based adaptive beamforming scheme with magnitude-only constraints,” *Progress In Electromagnetics Research B*, Vol. 11, 1–14, 2009.
 24. Byrne, D., M. O’Halloran, E. Jones, and M. Glavin, “Transmitter-grouping robust capon beamforming for breast cancer detection,” *Progress In Electromagnetics Research*, Vol. 108, 401–416, 2010.
 25. Mallipeddi, R., J. P. Lie, P. N. Suganthan, S. G. Razul, and C. M. S. See, “Near optimal robust adaptive beamforming approach based on evolutionary algorithm,” *Progress In Electromagnetics Research B*, Vol. 29, 157–174, 2011.
 26. Palanisamy, P. and N. Rao, “Direction of arrival estimation based

- on fourth-order cumulant using propagator method,” *Progress In Electromagnetics Research B*, Vol. 18, 83–99, 2009.
27. Zhang, X., X. Gao, G. Feng, and D. Xu, “Blind joint DOA and dtd estimation and identifiability results for MIMO radar with different transmit/receive array manifolds,” *Progress In Electromagnetics Research B*, Vol. 18, 101–119, 2009.
 28. Zhang, X., X. Gao, and W. Chen, “Improved blind 2D-direction of arrival estimation with L-shaped array using shift invariance property,” *Journal of Electromagnetic Waves and Applications*, Vol. 23, Nos. 5–6, 593–606, 2009.
 29. Yang, P., F. Yang, and Z.-P. Nie, “DOA estimation with sub-array divided technique and interpolated esrfit algorithm on a cylindrical conformal array antenna,” *Progress In Electromagnetics Research*, Vol. 103, 201–216, 2010.
 30. Park, G. M., H. G. Lee, and S. Y. Hong, “DOA resolution enhancement of coherent signals via spatial averaging of virtually expanded arrays,” *Journal of Electromagnetic Waves and Applications*, Vol. 24, No. 1, 61–70, 2010.
 31. Lui, H. S. and H. T. Hui, “Effective mutual coupling compensation for direction-of-arrival estimations using a new, accurate determination method for the receiving mutual impedance,” *Journal of Electromagnetic Waves and Applications*, Vol. 24, Nos. 2–3, 271–281, 2010.
 32. Zaharis, Z. D., D. G. Kampitaki, P. I. Lazaridis, A. I. Papastergiou, A. T. Hatzigaidas, and P. B. Gallion, “Improving the radiation characteristics of a base station antenna array using a particle swarm optimizer,” *Microwave and Optical Technology Letters*, Vol. 49, No. 7, 1690–1698, 2007.
 33. Perez Lopez, J. R. and J. Basterrechea, “Hybrid particle swarm-based algorithms and their application to linear array synthesis,” *Progress In Electromagnetics Research*, Vol. 90, 63–74, 2009.
 34. Zhang, S., S.-X. Gong, and P.-F. Zhang, “A modified PSO for low sidelobe concentric ring arrays synthesis with multiple constraints,” *Journal of Electromagnetic Waves and Applications*, Vol. 23, Nos. 11–12, 1535–1544, 2009.
 35. Carro Ceballos, P. L., J. De Mingo Sanz, and P. G. Dúcar, “Radiation pattern synthesis for maximum mean effective gain with spherical wave expansions and particle swarm techniques,” *Progress In Electromagnetics Research*, Vol. 103, 355–370, 2010.
 36. Naghavi, A. H., M. Tondro-Aghmiyouni, M. Jahanbakht, and A. A. Lotfi Neyestanak, “Hybrid wideband microstrip Wilkinson power divider based on lowpass filter optimized using

- particle swarm method,” *Journal of Electromagnetic Waves and Applications*, Vol. 24, Nos. 14–15, 1877–1886, 2010.
37. Afshinmanesh, F., A. Marandi, and A. Rahimi-Kian, “A novel binary particle swarm optimization method using artificial immune system,” *Proceedings of the EUROCON 2005 — The International Conference on Computer as a Tool*, Vol. 1, 217–220, 2005.
 38. Kennedy, J. and R. C. Eberhart, “A discrete binary version of the particle swarm algorithm,” *Proceedings of the World Multiconference on Systemics, Cybernetics and Informatics*, 4104–4109, 1997.